


MAC Downlights

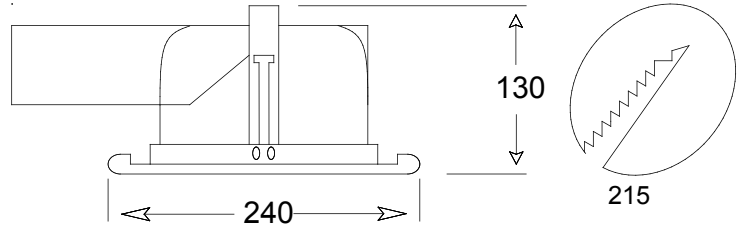

- Dimmable version available
- Supplied complete with lamps
- Remote Emergency option

A recessed downlight with open front for use in corridors, receptions and communal areas of buildings. Suitable for ceiling mounting only. The body of the fitting is made of zinc sheet, the bezel is white powder coated sheet steel and the springs are made of hardened zinc coated steel. Can be supplied with remote emergency.

ORDER CODES

1 x 13w	Open Downlight	MAC113
1 x 18w	Open Downlight	MAC118
1 x 26w	Open Downlight	MAC126
2 x 13w	Open Downlight	MAC213
2 x 18w	Open Downlight	MAC218
2 x 26w	Open Downlight	MAC226
	High Frequency Ballast	/HF
	Remote Emergency	/EMR
	1-10v Dimming	/DIM
	DALI Dimming	/DALI
	DSI Dimming	/DSI

Classification for Protection & Standards

Against electrical shock Class1 protected with earthed metalwork. Against ingress of dirt and moisture IP65. The fitting is designed and manufactured to meet the requirements of BSEN60598-2-1.

SPECIFICATION

A recessed downlight with open front, to use PL-C lamps finished with a white Bezel, as Preslite MAC Range