


MACDG Downlights

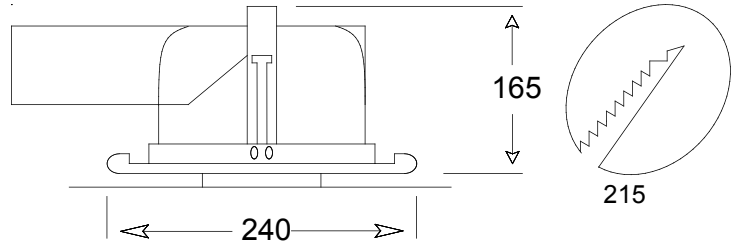

- Dimmable version available
- Dropglass Supplied as standard
- Supplied complete with lamps
- Remote Emergency option

A recessed downlight with dropglass for use in corridors, receptions and communal areas of buildings. Suitable for ceiling mounting only. The body of the fitting is made of zinc sheet, the bezel is white powder coated sheet steel and the springs are made of hardened zinc coated steel. Can be supplied with remote emergency.

ORDER CODES

1 x 13w	Dropglass Downlight	MAC113DG
1 x 18w	Dropglass Downlight	MAC118DG
1 x 26w	Dropglass Downlight	MAC126DG
2 x 13w	Dropglass Downlight	MAC213DG
2 x 18w	Dropglass Downlight	MAC218DG
2 x 26w	Dropglass Downlight	MAC226DG
	High Frequency Ballast	/HF
	Remote Emergency	/EMR
	1-10v Dimming	/DIM
	DALI Dimming	/DALI
	DSI Dimming	/DSI

Classification for Protection & Standards

Against electrical shock Class1 protected with earthed metalwork. Against ingress of dirt and moisture IP40. The fitting is designed and manufactured to meet the requirements of BSEN60598-2-1.

SPECIFICATION

A recessed downlight supplied with dropglass, to use PL-C lamps finished with a white Bezel, as Preslite MACDG Range