MFDC 428/454

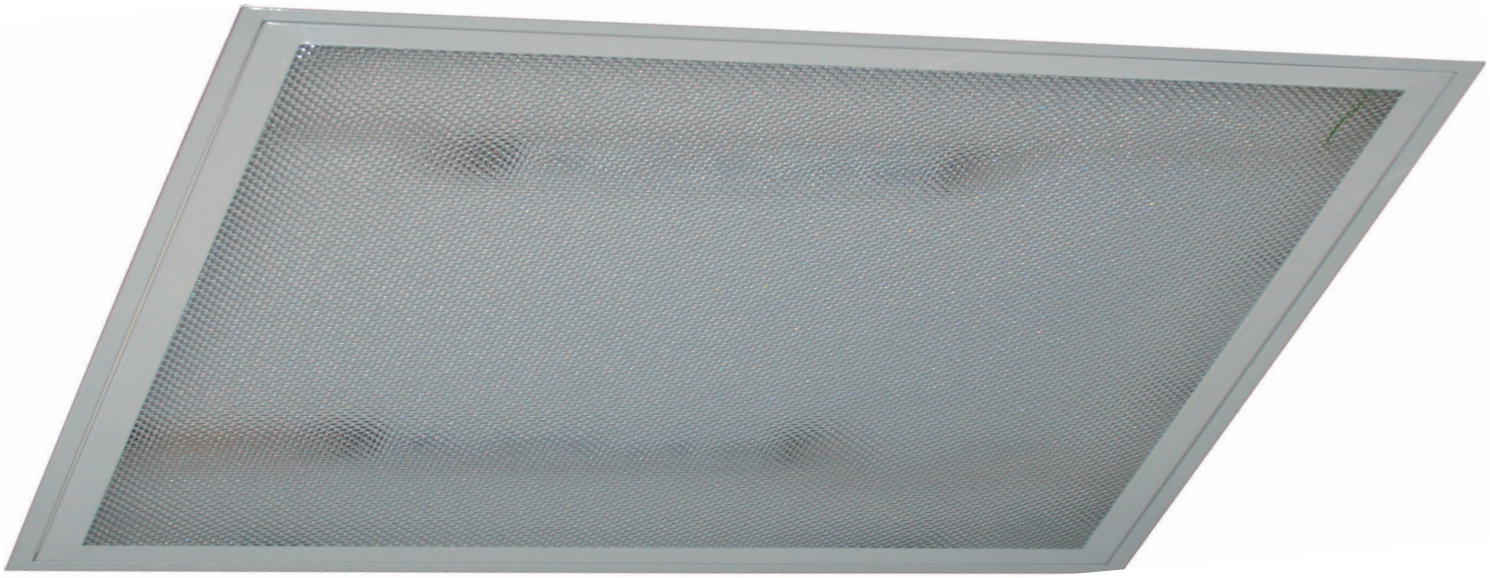

- IP20 enclosed Steel body
- White powder coated steel body
- Wishbone retained prismatic diffuser
- Dimmable versions available
- Integral Emergency Version

T5 Fluorescent Recessed Luminaire for use in Offices, Reception Areas, Retail Outlets and Meeting Halls. The body is white powder coated steel with a wishbone retained prismatic diffuser. Suitable for installation into both 15mm & 25mm exposed tee ceiling grid systems. Available in 28w & 54w versions. Can be supplied with integral 3hr emergency, can be fitted with integral occupancy sensor and is also available in a dimmable version.

ORDER CODES		
4 x 28w	4x28w T5 prismatic diffuser 600x600 recessed modular	MFDC428
4 x 54w	4x54w T5 prismatic diffuser 600x600 recessed modular	MFDC454
	Integral Emergency	/EM
	1-10v Dimming	/DIM
	DALI Dimming	/DALI
	DSI Dimming	/DSI
	Integral Occupancy Sensor	/OCC

S P E C I F I C A T I O N

Rigid steel constructed fluorescent luminaire fully enclosed and powder coated in white finish c/w TPb prismatic diffuser in wishbone spring retained frame, for use with 4 x T5 Lamps in the range 28/54W. Integral emergency, High Frequency digital or analogue dimming. Recessed mounting. As Preslite MFDC T5 Range.